


PERFORMANCE CURVE

2 POLE 50 Hz

V09

65-125/4 (4.0kW) – impeller diameter = 128 mm
 65-125/5.5 (5.5kW) – impeller diameter = 138 mm
 65-125/7.5 (7.5kW) – impeller diameter = 149 mm

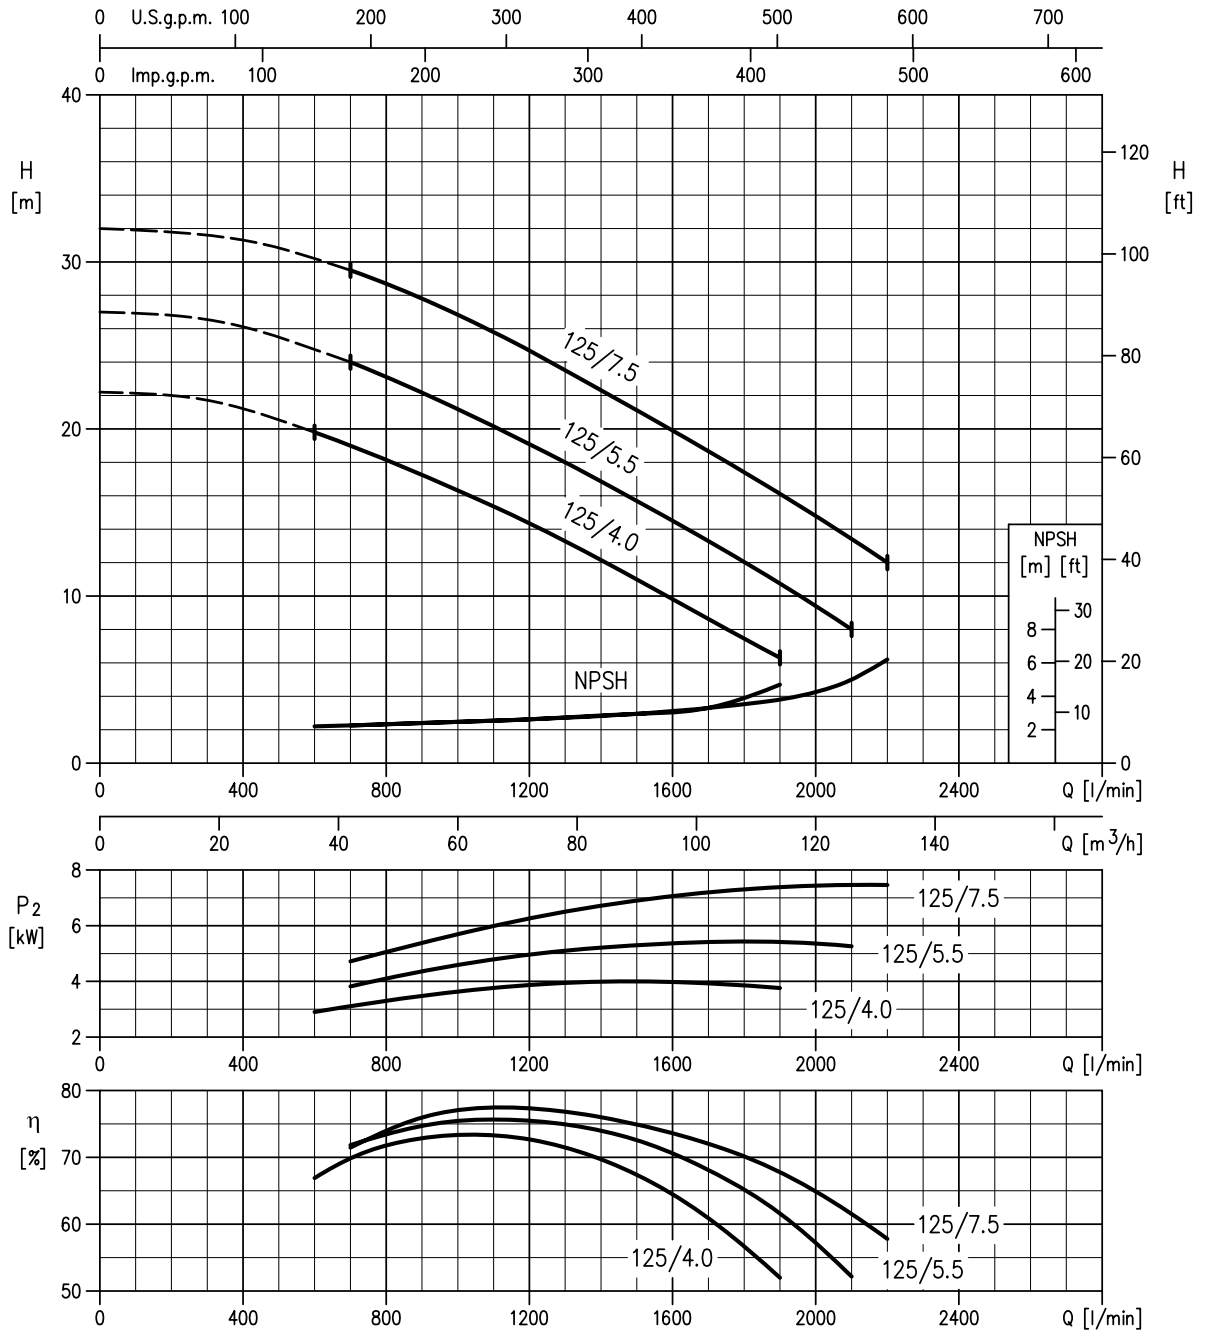

Rotation speed ≈2900 min⁻¹
 Test standard : ISO 9906 Annex A