


PUMP RANGE	B, E, S
MODEL	041
STATUS	CURRENT



SECTION	3
PAGE	04101
DATE	July 1996

PERFORMANCE DATA

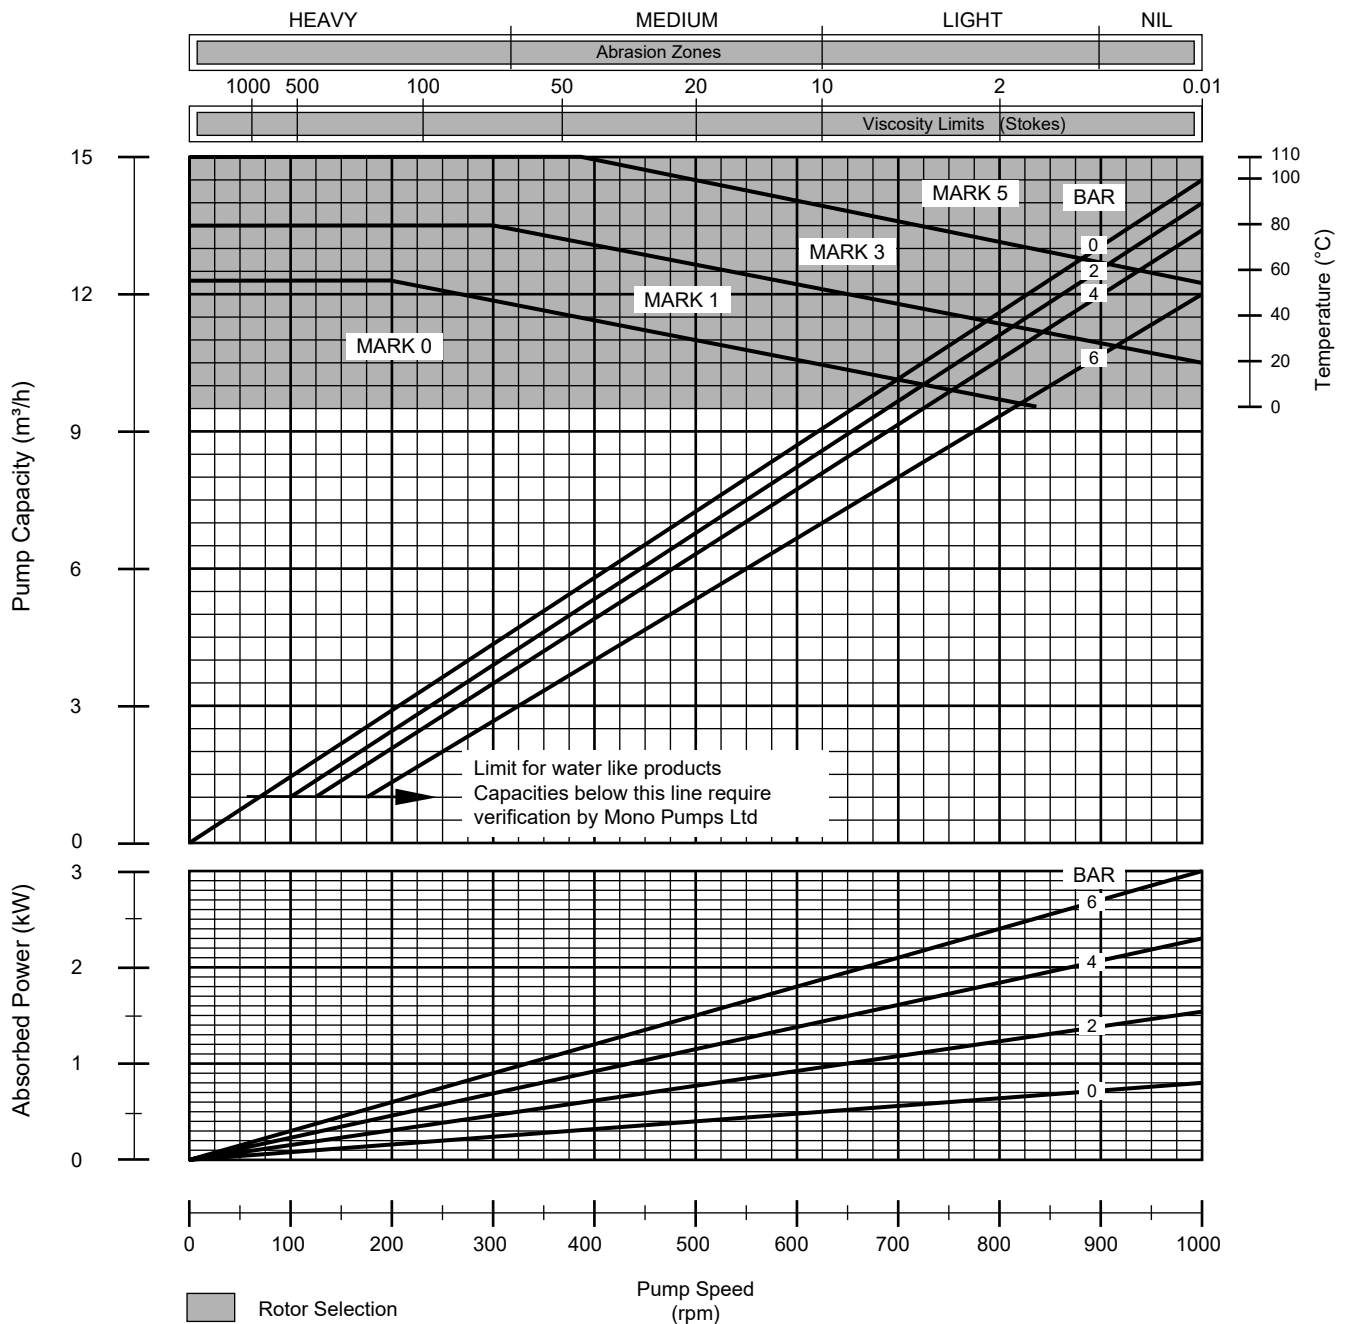

MK0 ROTOR SELECTION	MK0 rotor is only to be used when viscosity is < 200cst and pressure is > 2 bar/stage OR > 3m suction lift.					
SLIP CORRECTION	$n = \text{corrected duty speed, } n_o = \text{rpm @ 0 bar, } n_p = \text{rpm @ duty press.}$ $n_s = \text{Slip Speed} = n_p - n_o, f \times n_s = \text{Slip Speed Correction} = f \cdot n_s$ Slip Corrected Speed ($n = n_p - f \cdot n_s$)					
TEST PARAMETERS	Above data represents tests on water @ 20°C using RR and RA stator materials.					
FOOD APPLICATIONS	Check customer CIP process if available. Refer to Section 2 for CIP suitability					
	SOLIDS HANDLING (mm)		STARTING TORQUE (Nm)			
	Hard Angular	Soft and compressible	Mark 0	Mark 1	Mark 3	Mark 5
B	6	22	50	30	30	30
E	6	22	50	30	30	30
S	6	22	50	30	30	30

