
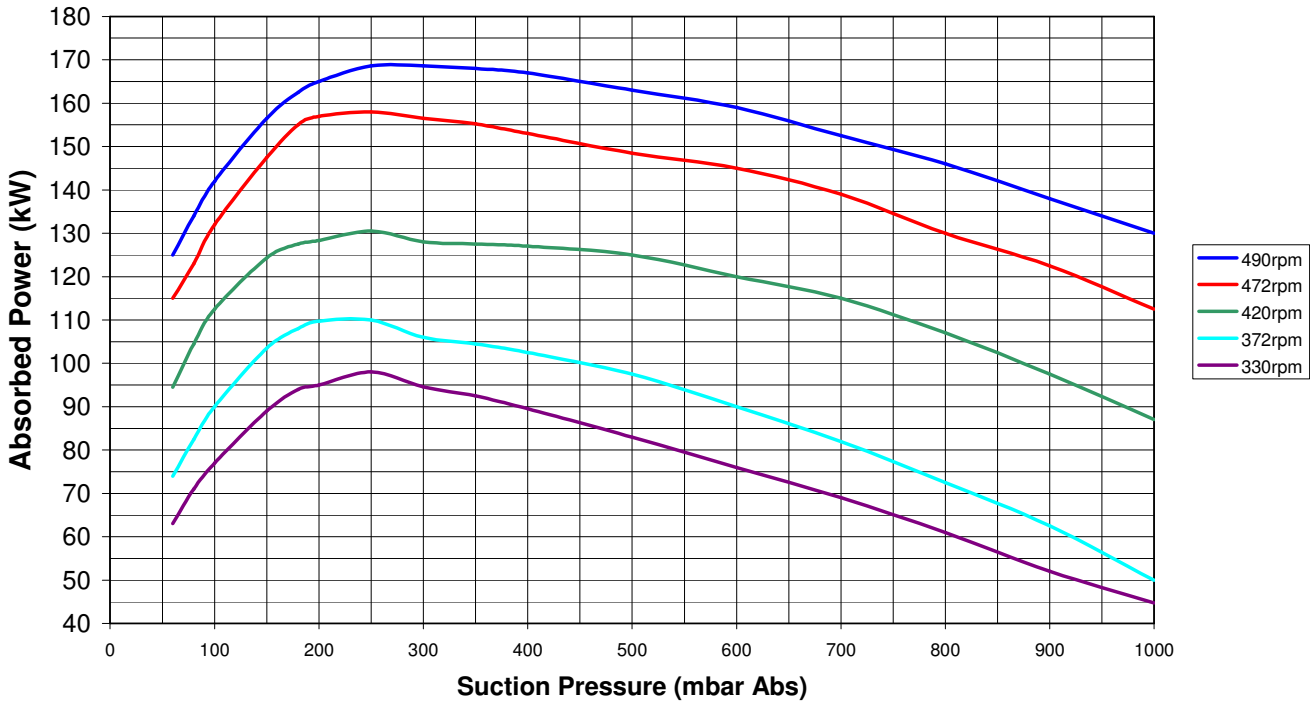


Performance Curve – Model: N2BE/HV 300 - 8000

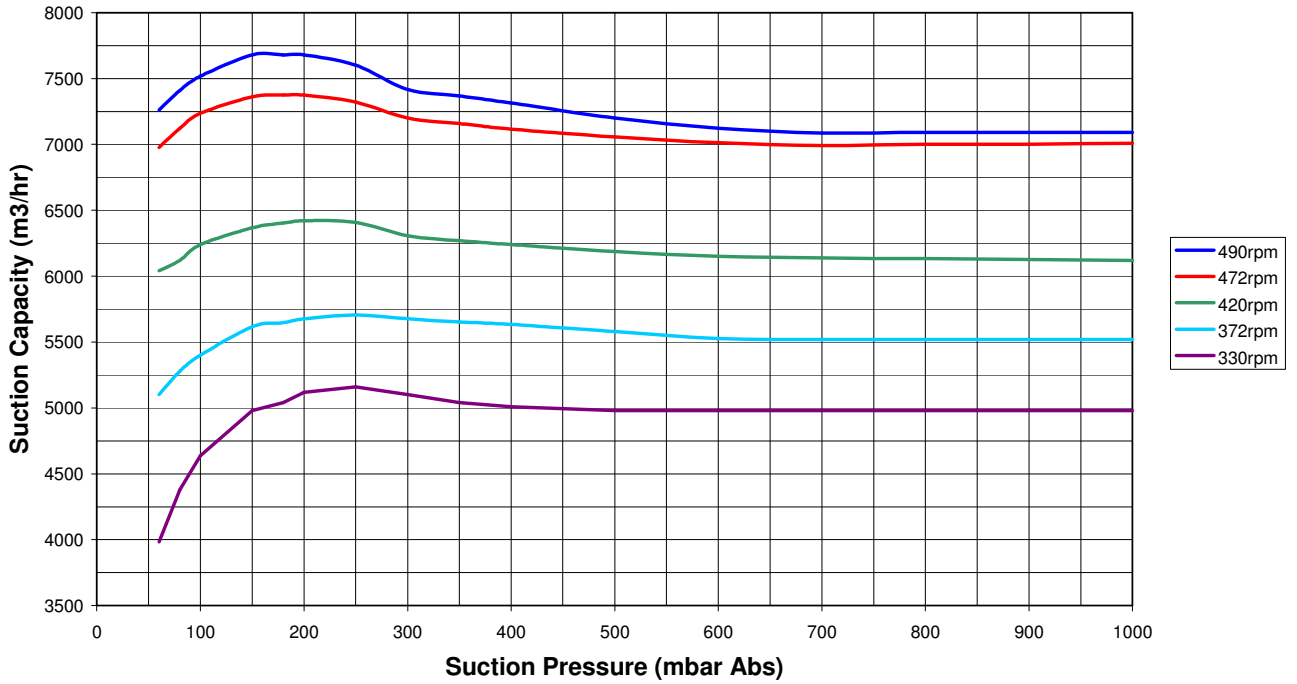

Service liquid flow rates (m3/hr) @ various suction pressures				
RPM	< 200 mbar	200 – 400 mbar	400 – 600 mbar	> 600 mbar
490	19.0 - 20.0	15.5 - 16.5	13.0 - 14.0	6.5 - 7.5
472	17.5 - 18.5	14.0 - 15.0	11.5 - 12.5	5.5 - 6.5
420	15.5 - 16.5	12.5 - 13.5	10.0 - 11.0	5.0 - 6.0
372	13.5 - 14.5	11.0 - 12.0	9.0 - 10.0	4.5 - 5.5
330	12.0 - 13.0	9.5 - 10.5	8.0 - 9.0	4.0 - 5.0

Performance Curves refer to :
 Inlet Saturated Air @ 20°C
 Service Liquid = Water @ 15°C.
 Tolerance on capacity and absorbed power = +/- 5%